

Overview


The 276B-1120 noncoded fire alarm station is a contemporary styled Lexan station, flexibly designed to meet a wide variety of application requirements and operational sequences.

The station is single action with terminals for field wiring connections.

A key (supplied) is required to reset mechanism.

For semi flush mounting use a standard North-American 4 inch square box with single gang plaster cover having an overall minimum depth of 2-1/4 inches (57mm). For surface mounting use a Cat. No. 276B-RSB surface back box.

Installation and Mounting

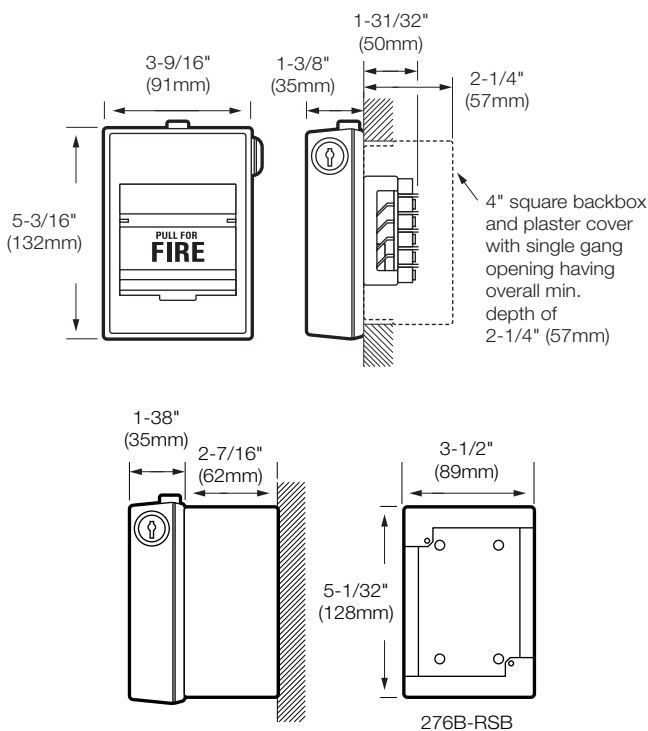

Standard Features

- Single pole contacts
- Terminals for field connections
- General alarm operation
- Key lock reset
- Break glass operation
- Surface or semi flush mounting
- Red finish
- Contemporary styling
- Rugged LEXAN construction
- Latch action until reset

Operation

To initiate an alarm and break the glass rod on the 276B-1120, pull down on the handle marked "Pull for Fire".

The alarm handle latches in the pulled position until the station is manually reset. To reset, the station is opened using a Cat. No. 276-K1 key supplied with the station; the toggle switch is restored to its normal position, the break glass rod is replaced and the station is reclosed.

Ordering Information

Cat. No.	Description
276B-1120	Single action pull stations. General alarm contacts with screw terminals. Key operated reset. Single Pole Alarm Contact. Open Circuit. 3.0 Amps, 30VAC, Resistive Load 1.0 Amps, 28Vdc, Resistive Load
Accessories	
276-GLR	Replacement glass rods - 20 per package
276B-RSB	Surface back box, red

Fire Alarm Stations

276B-1120



276B-1120

