

50' VIEWING



DESCRIPTION

Unparalleled in reliability, AimLite's Exit Signs utilize the latest photoluminescent technology including the photoluminescent materials which absorb and store any ambient light. In the event of an emergency with blackout or smoky conditions this stored energy is immediately visible, creating a clearly recognizable, photoluminescent egress indicator. AimLite's Exit Signs reduce the risk of panic or injury during an evacuation, offering greater peace of mind while saving on energy and maintenance costs.

APPLICATIONS

Commercial, property management, lite industrial.


FEATURES

- Requires no electricity to operate
- Reliability
- Non-toxic, non-radioactive
- Low-cost, easy installation
- Can be used for both high-level and low-level applications
- Requires no maintenance with only periodic inspections
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 50 feet in total blackout (UL 924, ULC, CCMC 13211-R)
- Saves on energy costs
- Listed to UL 924 through UL, meeting all current building codes, meets NFPA
- Life Safety Code 101 and OSHA requirements
- Energy Star
- Frames available

TECHNICAL

- **Background:** Photoluminescent
- **Visibility:** 50 feet
- **Directional:** 2 arrows included
- **Construction:** Available in Rigid PVC photoluminescent Panel or 0.8 mm aluminum panel with rounded corners, with red text.
- **Durability:** Explosion-proof for areas requiring explosion-proof exit signage
- **Tests Passed:** UL 924 Emergency Lighting and Power Equipment Listed through UL; UL/ULC - 924.
- **Life Expectancy:** 25+ years
- **Power Requirements:** NO electrical or mechanical source required
- **Installation:** Before installation it must be determined that there is a minimum of 54 lux of fluorescent light on the face(s) of the sign at all times during building occupancy.
- **Applications:** Both high-level and low-level

DIMENSIONS

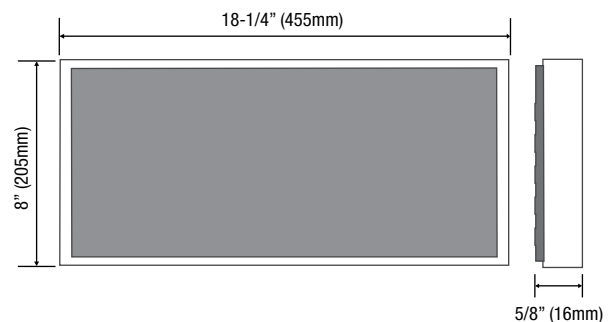

ORDERING GUIDE

SIGN

| Series | Description |
|---------|---|
| AIMP619 | Plastic photoluminescent panel/red letter |

NOTE: Frame sold separately.

MOUNTING FRAME

Frame accessories†

- PF6191WBK - Single face wall black
- PF6191CBK - Single face ceiling black
- PF6191EBK - Single face end black
- PF6192CBK - Double face ceiling black
- PF6192EBK - Double face end black
- PF6191WSI - Single face wall silver
- PF6191CSI - Single face ceiling silver
- PF6191ESI - Single face end silver
- PF6192CSI - Double face ceiling silver
- PF6192ESI - Double face end silver

† Details for frame dimensions, consult the Aluminum mounting frame page.